



KURVEO TOUCH-SENSITIVE KIOSK

Curved touchscreen, with a trendy, bright design

SAGA



Introducing KURVEO, the touch-sensitive kiosk with a **curved screen** from SAGA. Our customers' experience in the field led us to develop a **self-service checkout** which boasts an aesthetic design unprecedented on the kiosk market.

This payment kiosk is equipped with the basic elements of a **stand-alone display station** including a 23.6" curved capacitive touchscreen, a thermal receipt printer and a 2D scanner/NFC reader, combined with an arm fitted with a bracket capable of holding a payment terminal **compatible with all brands**.

The KV238W/A self-ordering kiosk is available for Windows and Android operating systems, and has been designed to provide **quick and easy access** to the components (paper change, scanner settings, EPT connection, etc.)

This interactive kiosk is equipped with a **LED at the base** controlled by a programme to be integrated into the checkout software to manage the status indicator lights.



PRODUCT KEY FEATURES

- 23.6" self-ordering kiosk, Android or Windows operating system
- Curved touchscreen design
- Integration of a 2D scanner, a printer and an EPT support
- Easy access to modules

CHASSIS

Materials	Steel, tempered glass, stainless steel
Dimensions	L. 50 cm x D. 50 cm x H. 165 cm
Weight	45 kg
Hatch	Access to front panel components - right-hand locks, reinforced stainless steel hinges. 220V access at the back.
LED	Blue light strip, power indicator

DISPLAY

Diagonal	23.6" TFT LCD (60 cm)
Resolution	1920 x 1080
MTBF	30,000 hours
Luminance	350 cd/m2
Contrast ratio	3500:1
Angle of vision	H:89°, V:89°
Touch-sensitive panel	Projected capacitive 10 points
Glass hardness	7H

MOTHERBOARD


Processor	Intel® Core i5-1035U, 1.10GHz	RK3568 Cortex-A55 2.0 GHz
Chipset	Intel® HD Graphics	Mali-G52 2EE
Memory - Storage	4GB, SSD 128GB	4GB, 64GB
Available connectors	4 USB ports 4x RJ45 ports (LAN) 1000M 1 COM port	4 USB ports 4x RJ-45 ports 1000M
OS	Windows 10 IOT	Android 11
Loudspeakers	Amplified - 8Ω 5W.	
Wi-Fi- BT	RTL8821CE Wi-Fi - Bluetooth cards + integrated antennas	
Power supply	12V 7.7A. 100-240 VAC	

INTEGRATION

Thermal receipt printer	SGPR300L built-in printer, USB+ LAN interface, print speed 300 mm/sec. Thermal coil 80 x 80 x12.
Scanner/NFC	2D barcode reader, 640 x 480, USB connection. NCF reader distance 0-40 mm
LED strip	Card controlled by a serial protocol to be integrated into the checkout software - management of the kiosk status indicator

OPTIONAL

EPT support	Universal Novus bracket compatible with all brands of EPTs
Inverter	3 connectors, 600 VA
Colour	Matt black and glossy white
Electrical connection	From the floor or wall, slots provided

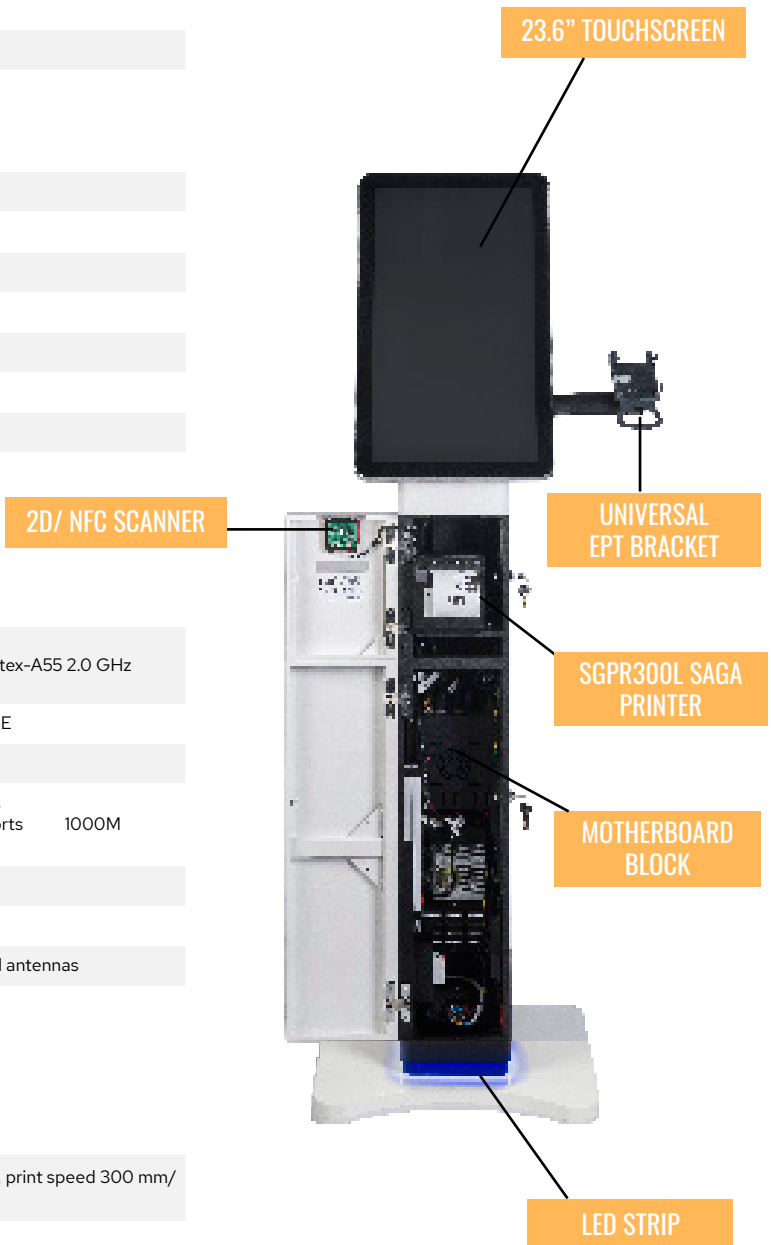

Flash this code to check out the latest news on PERIMATIC