



SGPR-200III

Robust, modern, elegant...
The essential triple interface



The fast, functional ticket printer.

The SGPR-200III boasts the strengths that made its predecessor a success and offers even greater reliability.

The SGPR-200III's compact size, sleek design and wide range of functions make it the ideal customer ticket printer for POS environments. It now offers a print speed of 260 mm/sec, for even faster checkout.

Equipped with a triple interface (USB / serial / Ethernet) and compatible with ESC/POS and OPOS languages, it guarantees perfect integration with any POS system. It easily prints complex barcodes, such as PDF and DATAMATRIX. The SGPR200III can also be wall-mounted, as is often the case in foodservice..

Top-loading, robustness and excellent value for money make the SAGA SGPR-200III the ideal choice to replace or complement your existing POS printers.



THE KEY FEATURES

- Printing speed 260mm/s
- Triple Interface : USB, RS-232, Ethernet
- 2D code printing
- POS-compatible design and configuration for all brands
- Ticket exit beep function available

PRINTER

FEATURES

Printing technology	Direct Thermal
Print speed	260 mm / sec
Print width	Max 72 mm / 576 dots per line
Characters / line	Font A: 12x24 Dots Font B: 9x17 Dots
Number of dots	203 DPI
Buffer	256KB
Guillotine	Partial cut
Paper loading	From the top of the printer
Beep function	Available after guillotine cutting
Manufacturer's warranty	3 years

PAPER

FEATURES

Reference	PT80
Width	80 mm
Thickness	0,06~0,08 mm
Roller diameter	80mm +/- 0,5 mm

PRINTABLE

FEATURES

Fonts	PC850/PC347/PC860/PC863/PC865/PC866/PC852/PC858
Bar code	UCP-A/UCP-E / EAN13/EAN8 / CODABAR / ITF-25 / CODE 39/ CODE93/CODE 128
2D barcodes	QR Code/ PDF417
Font sizes	48 or 42 in Font A, 64 or 56 in Font B
Emulation	ESC/POS -OPOS- POS compatible for. net


CONNECTIONS

Interface	USB, RS232, Ethernet
Cash drawer control	1 RJ-11 6-pin port
Buzzer	Integrated
Power supply	AC 100~240V (50~60HZ ≤ 1.5A)
Cables	USB, RS232 supplied
Compatible drivers	Windows/ Linux/ Android/ Mac OS

PHYSICAL

FEATURES


Dimensions	152 x 134 x 125 mm
Weight	0.84 Kg
Wall mounting	66 mm between the two mounting points
Materials	Steel and ABS
Operating temperature	0 to 45°C, humidity 10 to 80%.
Storage temperature	-10 to +60°C, humidity 10 to 90%.
MCBF	150 Km of PT-80 paper, cutter 1.5 million cuts
Colors	Black and matte varnish
Marking	CE, FCC, RoHS

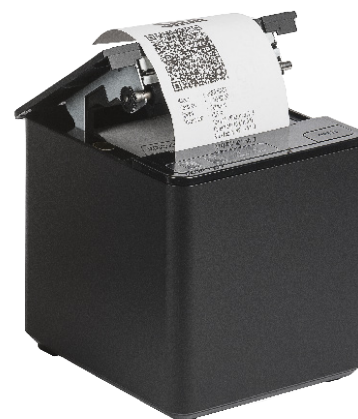

HOOD OPENING UPWARDS



TRIPLE USB, SERIAL AND LAN INTERFACE



Flash this code to find
all PERIMATIC news